

# Bicycle Racks > Horizontal

VANDAL RESISTANT


AS2890.3 COMPLIANT

## Compact CBR1SCTM Fully-welded

**CBR1SCTM**  
Hot Dipped Galvanised  
**SCBR1SCTM**  
Stainless Steel




40 x 8mm Base Rails

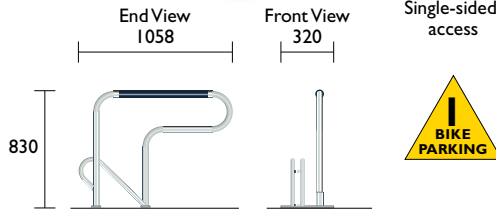


## Compact CBR2SCTM Fully-welded

**CBR2SCTM**  
Hot Dipped Galvanised  
**SCBR2SCTM**  
Stainless Steel

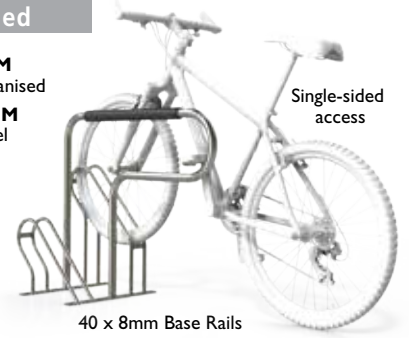

Single-sided access

40 x 8mm Base Rails

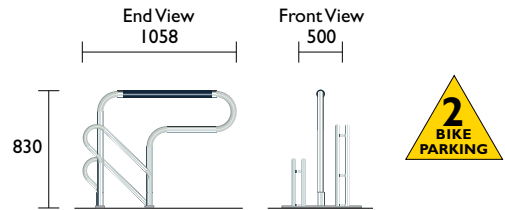

## Compact CBR4SCTM Fully-welded

**CBR4SCTM**  
Hot Dipped Galvanised  
**SCBR4SCTM**  
Stainless Steel

Vandal Resistant


plastic sleeve protects bicycle

32NB Pipe Leaning Rails

Ø19 Pipe Wheel Supports

40 x 8mm Base Rails  
Single-sided access

4 BIKE PARKING

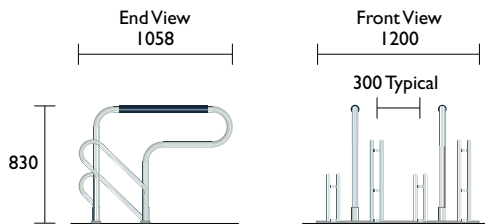

## Compact CBR6SC Fully-welded

**CBR6SC**  
Powder Coated  
**CBR6SCG**  
Hot Dipped Galvanised  
**SCBR6SC**  
Stainless Steel

plastic sleeve protects bicycle

32NB Pipe Leaning Rails


Ø19 Pipe Wheel Supports

40 x 8mm Base Rails  
Single-sided access

Bicycle Spacings 500mm

Provides wider spacings for easier parking

6 BIKE PARKING

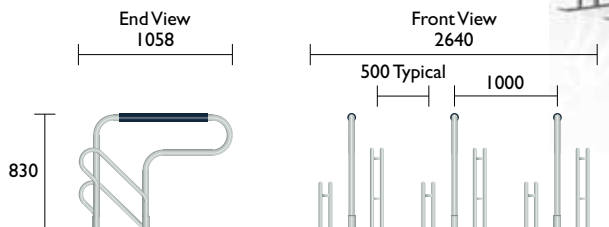

These fully welded units are supplied ready to be bolted down. They are available in either hot dipped galvanised or stainless steel. Being fully welded, they are more suitable for vandal resistant applications.

### Material Specifications (General)

Mild steel 32NB (38.0) x 1.5mm / Ø19 x 1.2mm Pipe / 8mm Plate / Hot dipped galvanised / Powder coated in a range of colours  
Stainless steel 32NB (38.0) x 1.5mm / Ø19 x 1.2mm Stainless steel pipe / 8mm Plate / Linished

