

Industrial

RPGS

Fabrication

Frame
75 x 75 RHS




Frame
50 x 50 RHS




Viewed from secure side

50 x 50 x 4 welded mesh illustrated

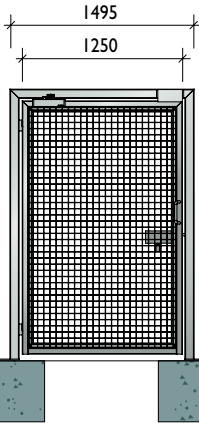

Optional Disabled Access Kit

- Low energy (DDA compliant) 240V / 2.5A
- Complies with emergency exit requirements
- Controlled via a PLC
- Programmable to work with access control systems
- Other options include UPS function, electric locking and safety sensor.



Pavement Surface

Security

PSWS / PSWSC

Fabrication

Post / O/head Rail
75 x 75 RHS



Frame
50 x 50 RHS



Viewed from secure side



With overhead rail

25 x 25 RHS pickets illustrated



Shown with slimline mortice lock.

PSWS

With overhead rail
PSWSC

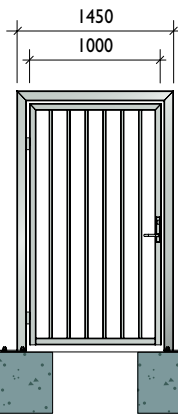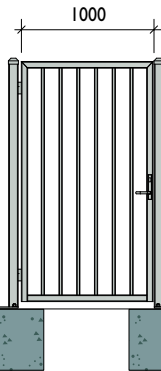

25 x 25 RHS pickets illustrated
> Refer to p76 for infill options

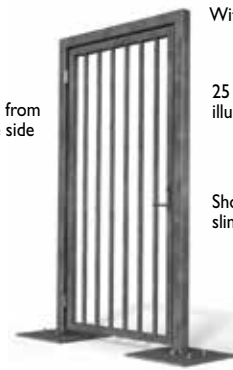

Pavement Surface

Lock Options					Auto Closer	Finish		
Padlock	Drop Bolt	Mortice	Magnetic	Electric		Hot Dip Gal	Powdercoat	Wet Spray
Standard	Standard	N/a	N/a	N/a	N/a	Incl	Incl	Opt
N/a	N/a	Optional	Optional	Optional	Optional	Incl	N/a	Opt
Optional	Optional	Optional	Optional	Optional	Optional	Incl	N/a	Opt
Optional	Optional	Optional	Optional	Optional	N/a	Incl	Incl	Opt
Optional	Optional	Optional	Optional	Optional	Optional	Incl	Incl	Opt